



METAL FORM MANUFACTURING CO., INC
 5960 WEST WASHINGTON STREET
 PHOENIX, ARIZONA 85043
 TELEPHONE: 602-233-1211 FAX: 602-233-2033
 WEBSITE ADDRESS: WWW.MFMCA.COM

Model MFS-40 Counterbalanced Backdraft Damper Aluminum

Specifications


- Frame:** .060" 6063-T5 Extruded aluminum.
- Blades:** .032" Formed aluminum blades.
- Bearings:** Nylon.
- Axles:** 3/16" Diameter celcon.
- Seals:** PVC or Neoprene.
- Counterbalance:** As required for up-flow, down-flow, or horizontal airflow applications. (Non - adjustable)
- Max. Velocity:** 1500 FPM @ 1" w.g.
- Minimum size:** 6" x 6"
- Maximum size:** 30"w x 30"h.
Multiple section - unlimited size.

Options

- Flanged frame.
- Sleeves.

Notes

1. Width x height are nominal opening dimensions. Unless specified otherwise, units will be constructed 1/4" undersize.
2. Metal Form reserves the right to improve design or change specifications at any time.

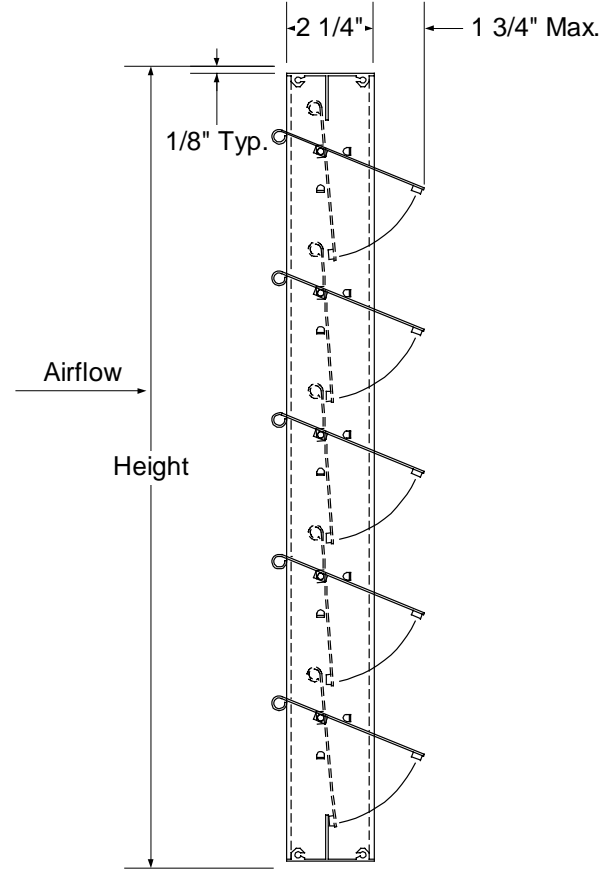

Section View

Tag	Qty.	Width	Height	No. of Panels (W x H)	Options	Finishes/Specify	Remarks

Project: _____
 Architect: _____
 Engineer: _____
 Contractor: _____